
## **INSTALLATION NOTES:**

- 1. FOOTING MATERIALS & INSTALLATION BY OTHERS. TOOLS BY OTHERS.
- 2. BOLTS PROVIDED.
- 3. CHOOSE DIRECTION WAYNE TYLER LOGO ON BOLLARD WALL SHOULD FACE. CAST-IN OR CORE DRILL (4) 1-1/2"DIA. x 5"DEEP GROUT POCKETS INTO FOOTING PER ANCHOR BOLT PATTERN.
- 4. TAKE (4) 1/2" DIA. x 4-1/2" LONG ANCHOR BOLTS AND SCREW AN INCH DEEP INTO (4) 1/2"DIA. S.S. THREADED INSERTS, LEAVING 3-1/2" OF THE ANCHOR BOLT EXPOSED.
- 5. FILL ALL GROUT POCKETS WITH NON-SHRINK GROUT. INSERT BOLLARD WITH ANCHOR BOLTS INTO GROUT POCKETS.

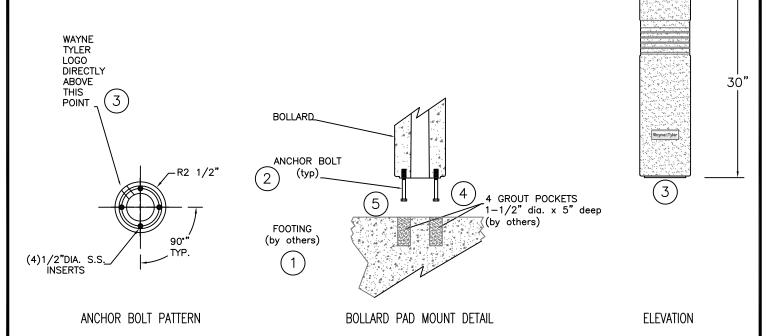

MOUNTING AND INSTALLATION INSTRUCTION SUBJECT TO CHANGE/UPDATE. SEEK THE MOST RECENT VERSION. 5/2017

	PLAN TYPE:	MOUNTING AND INSTALLATION	<b>date</b> : 06/01/17	FILE NO. 281NL	SHEET 1
Wayne :: Tyler	PRODUCT:	281NL NON-LIT CONCRETE BOLLARD	scale: AS NOTED	drawn by: BGH	OF
	MOUNTING TYPE:	PAD MOUNT			